



CLESCO

"The Abrasive Hardware Specialist"

Motor & Grinder Shaft Arbors

- Nut Lock Type – for smooth shafts
- For mounting various wheels (buffs, wire brush, non-woven, etc.)
- Arbor is secured to smooth motor shafts with socket set screws
- RH (right-hand) units with 1/2"-20 threaded arbors can also be used to mount Climax keyless chucks to drive various shank-mounted accessories
- Use RH (right-hand) type for counter-clockwise shaft rotation (facing shaft)
- Use LH (left-hand) type for clockwise shaft rotation (facing shaft)

Type A "Small"

This type is ideal for use on smaller fractional horse-power motors.



Type	Deluxe		Economy		Fits Shaft Dia.	Fits Wheel Hole	Thread	Max Wheel Width	Thread Length	O.A.L.
	Machined	Washer Dia.	Stamped	Washer Dia.						
A	A-320-D	1	A-320	1 1/4	1/4	3/8	R.H.	1/2	1 1/8	2
A	A-325-D	1	A-325	1 1/4	5/16	3/8	R.H.	1/2	1 1/8	2
A	A-330-D	1	A-330	1 1/4	3/8	3/8	R.H.	1/2	1 1/8	2
A			AL-320	1 1/4	1/4	3/8	L.H.	1/2	1 1/8	2
A			AL-325	1 1/4	5/16	3/8	L.H.	1/2	1 1/8	2
A			AL-330	1 1/4	3/8	3/8	L.H.	1/2	1 1/8	2

Type B "Standard"

These Arbors have a 1/2" diameter threaded portion that is 1-13/16" long which can accommodate wheels up to 1-1/4" wide.



Type	Deluxe		Economy		Fits Shaft Dia.	Fits Wheel Hole	Thread	Max Wheel Width	Thread Length	O.A.L.
	Machined	Washer Dia.	Stamped	Washer Dia.						
B	AS-4	1 1/2	AS-4FS	1 5/8	1/2	1/2	R.H.	1 1/16	1 13/16	3 1/2
B	AS-5	1 1/2	AS-5FS	1 5/8	5/8	1/2	R.H.	1 1/16	1 13/16	3 1/2
B	AL-4	1 1/2	AL-4FS	1 5/8	1/2	1/2	L.H.	1 1/8	1 13/16	3 1/2
B	AL-5	1 1/2	AL-5FS	1 5/8	5/8	1/2	L.H.	1 1/8	1 13/16	3 1/2
B	AL-6	1 1/2	AL-6FS	1 5/8	3/4	1/2	L.H.	1 1/8	1 13/16	3 1/2
B	AL-5-KW*	1 1/2			5/8	1/2	L.H.	1 1/4	1 13/16	3 1/2
B	AS-5-KW*	1 1/2			5/8	1/2	R.H.	1 3/16	1 13/16	3 1/2

*AL-5-KW and AS-5-KW have a keyway.



CLESCO

"The Abrasive Hardware Specialist"

Motor & Grinder Shaft Arbors

Type C "Extra Long"

Similar to Type B except the threaded portion is longer at 2-5/8" which can accommodate wheels up to 2" wide.



Type	Deluxe		Economy		Fits Shaft Dia.	Fits Wheel Hole	Thread	Max Wheel Width	Thread Length	O.A.L.
	Machined	Washer Dia.	Stamped	Washer Dia.						
C	A-3	1 1/2	A-3FS	1 5/8	3/8	1/2	R.H.	1 13/16	2 1/2	4 1/16
C	A-4	1 1/2	A-4FS	1 5/8	1/2	1/2	R.H.	1 13/16	2 1/2	4 1/16
C	A-5	1 1/2	A-5FS	1 5/8	5/8	1/2	R.H.	1 3/4	2 1/2	4 1/16
C	A-6	1 1/2	A-6FS	1 5/8	3/4	1/2	R.H.	1 3/4	2 1/2	4 1/16

Type D "Heavy Duty"


Designed especially for larger buffing & polishing units. The wide shoulder provides plenty of clearance plus ample space for easy movement & positioning of work pieces.



Type	Deluxe		Economy		Fits Shaft Dia.	Fits Wheel Hole	Thread	Max Wheel Width	Thread Length	O.A.L.
	Machined	Washer Dia.	Stamped	Washer Dia.						
D	AS-4-L	1 1/2	AS-4FS-L	1 5/8	1/2	1/2	R.H.	1 5/8	2 1/4	6 1/4
D	AS-5-L	1 1/2	AS-5FS-L	1 5/8	5/8	1/2	R.H.	1 5/8	2 1/4	6 1/4
D	AL-4-L	1 1/2	AL-4FS-L	1 5/8	1/2	1/2	L.H.	1 5/8	2 1/4	6 1/4
D	AL-5-L	1 1/2	AL-5FS-L	1 5/8	5/8	1/2	L.H.	1 5/8	2 1/4	6 1/4

Type E "Screw Lock" for Threaded Shafts

Designed for Threaded Shafts. Hex adapter can be used with longer screws to mount thicker wheels.

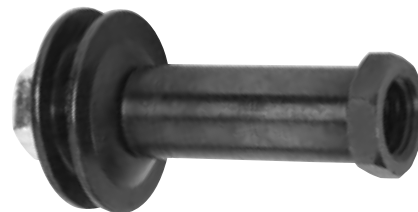

Type	Deluxe		Economy		Fits Shaft Dia.	Fits Arbor Hole	Wheel Width up to:	O.A.L.
	Machined	Washer Dia.	Stamped	Washer Dia.				
E			GA-1	1 5/8	5/8-11	1/2	1/2	2 1/4
E	GA-2	1 1/2			5/8-11	5/8	1/2	3